



## ZEECRANE 9000

ELECTRIC 9 TON  
CARRYDECK CRANE



- Zero-Emission, All-Electric design
- Strong 9 ton load chart
- Long boom length
- High 9 ton sheave height
- Asymmetrical high-strength booms
- LED boom work light
- Zee LMI system w/ interactive display
- EZee-Reeve multi-part load block
- Low noise operation
- Remote access diagnostics capability
- Extensive duty cycle
- No engine to fuel, maintain and repair

Zero Emission Equipment, LLC 14670 Randall Ave. Fontana, CA 92335  
(800) 698-8388 [www.zeecrane.com](http://www.zeecrane.com) [info@zeecrane.com](mailto:info@zeecrane.com)

# SPECIFICATIONS

# ZEECRANE 9000

<u>Boom length</u>		
Main boom	32' 11"	ft/in
Offset jib	9'	ft/in
<u>Sheave height</u>		
Main boom	37' 11"	ft/in
9' Offset jib attached	48'	ft/in
<u>Maximum reach</u>		
Main boom	30' 10"	ft/in
9' Offset jib attached	40'	ft/in
<u>Dimensions</u>		
<u>Length</u>		
Wheel Base	7' 1"	ft/in
Stowed Length	18' 10 3/4"	ft/in
Deck Length	13' 1/4"	ft/in
<u>Travel Height</u>	7' 2 1/4"	ft/in
<u>Width</u>		
Travel Width	6' 6 3/4"	ft/in
Outrigger Width	9' 8 1/2"	ft/in
<u>Base Weight</u>	18,700	lbs.
<u>Tires</u>		
Tire Size	Rubber	Solid
	8.25x15	in
<u>Electric System</u>		
Computerized inverter	72/12	VDC
Drive motors (dual)	7	KW
Hydraulic motor (single)	12/21	KW /peak
Battery system - Maintenance free	72/800	V/Ah



Zero Emission Equipment, LLC  
14670 Randall Ave.  
Fontana, CA 92335  
(800) 698-8388  
[www.zeecrane.com](http://www.zeecrane.com)  
[info@zeecrane.com](mailto:info@zeecrane.com)



# ZEECRANE 9000

## LOAD CHART

### Zee-CRANE 9000 9 Ton Carrydeck Crane


BOOM CONFIG	LOAD RADIUS FEET	MAIN BOOM CAPACITIES IN POUNDS			
		FRONT		360°	
		Rubber	Outriggers	Rubber	Outriggers
MAIN BOOM	5	9,100	18,000	7,650	16,500
	6	9,050	16,500	7,600	14,300
	8	8,900	14,200	6,100	10,650
	10	6,800	11,350	5,300	8,900
	12	5,000	10,000	3,900	6,450
	14	3,800	8,550	2,950	5,450
	16	3,250	7,600	2,400	4,500
	18	2,600	6,150	1,800	4,000
	20	2,350	5,200	1,550	3,200
	22	1,950	4,500	1,350	2,950
	24	1,700	3,900	1,100	2,600
	26	1,550	3,500	900	2,250
	28	1,450	3,100	700	1,900
	30	1,250	2,750	600	1,700

9 FT. Offset Jib Chart USE WITH OUTRIGGERS ONLY		Main Boom Angle / On Outriggers Only / 360 Degrees							
		70°	60°	50°	40°	30°	20°	10°	0°
Jib Offset	0°	5,700	2,650	2,050	1,450	1,300	950	800	800
	15°	3,250	2,550	1,950	1,400	1,300	1,000	0	0
	30°	2,750	2,500	1,900	1,350	1,200	1,000	0	0



# ZEECRANE 9000 DIMENSIONS

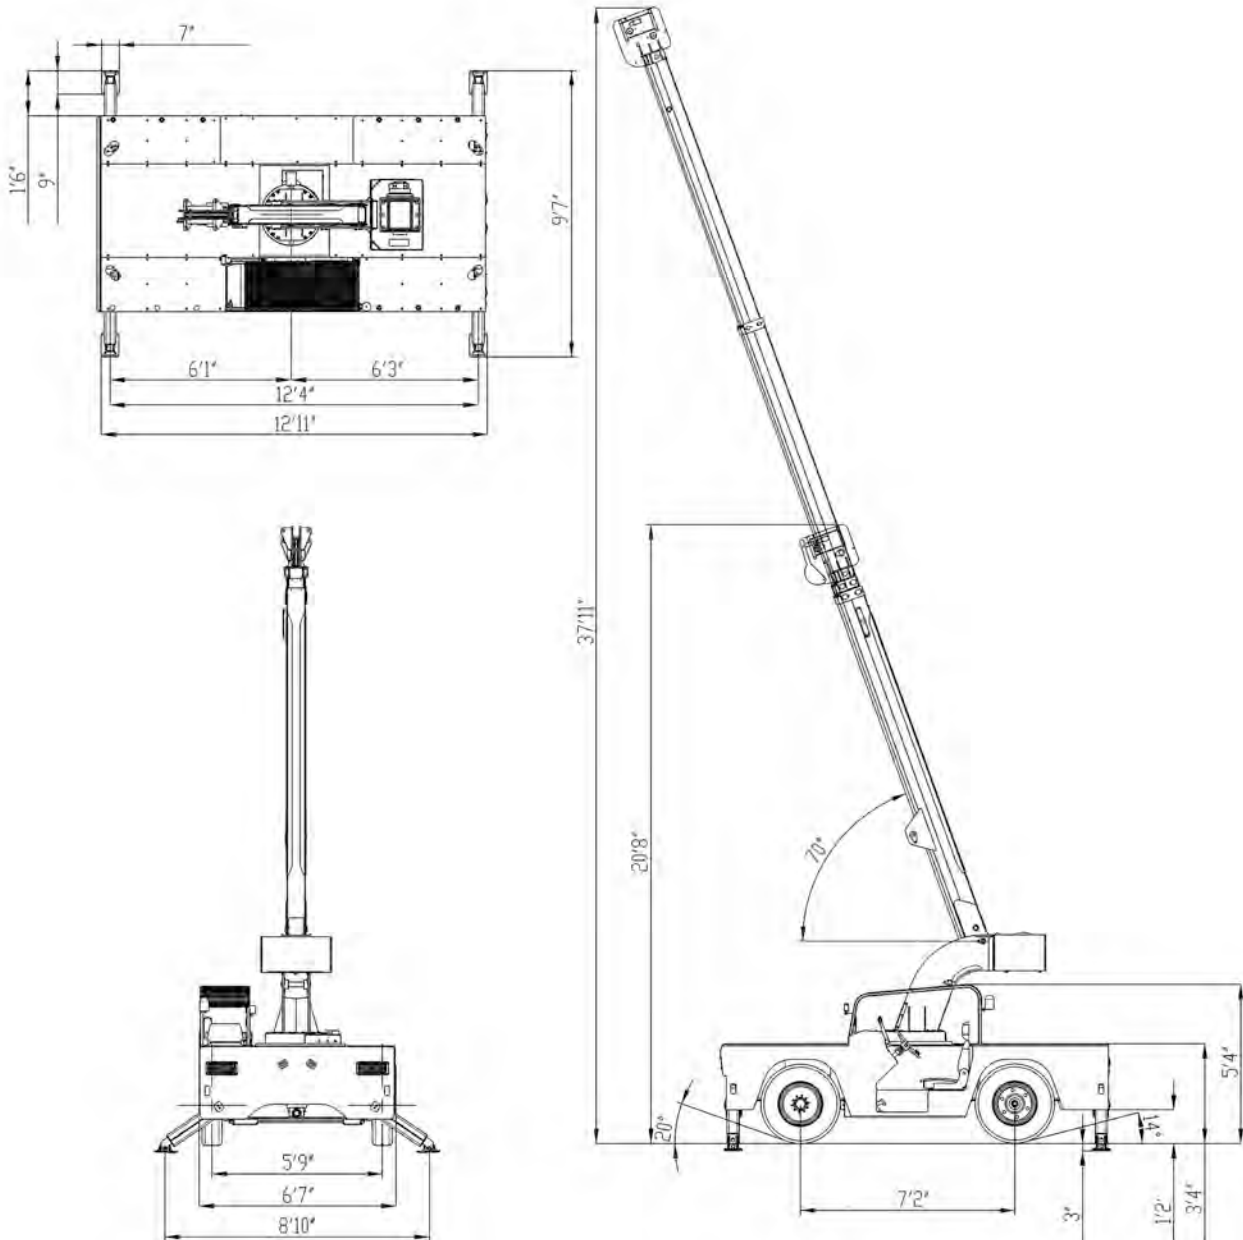

Zero Emission Equipment, LLC 14670 Randall Ave. Fontana, CA 92335  
 (800) 698-8388 [www.zeecrane.com](http://www.zeecrane.com) [info@zeecrane.com](mailto:info@zeecrane.com)